

TRACKER II

PIPE LOCATION SYSTEM

We all know how hard it is to admit when you're wrong.

When you're looking for a broken pipe underground, it can be a guessing game! Well, thanks to the UEMSI Tracker II® pipe location system, you do not have to guess anymore.

The UEMSI Tracker II is an extremely accurate and easy-to-use pipe location system. The Tracker II gives you the control for all of your locates with enhanced sensitivity and uncomplicated line identification.

By combining the Tracker II receiver with any of the UEMSI transmitters, you will see greater productivity with a faster, more reliable response.

With multi-frequency capabilities, the Tracker II in the 512 Hz mode, can locate the transmitter inside cast iron, clay, PVC, concrete or transit pipe at depths up to 24'. It can also detect live power lines or cable television lines in the 50-60 Hz mode. Also, using the optional 65 KHz transmitter with conductive attachments (not shown), the user can track water and gas pipes.



Tracker II Receiver



**TRACKER® IN-LINE
TRANSMITTER**



INVESTIGATOR® TRANSMITTER



THE EDGE® LOCATOR NOZZLE

UEMSI
PIPELINE CLEANING & TELEVISION EQUIPMENT

Corporate Office: 800-666-0766
Web Site: www.uemsi.com E-mail: info@uemsi.com

SPECIFICATIONS

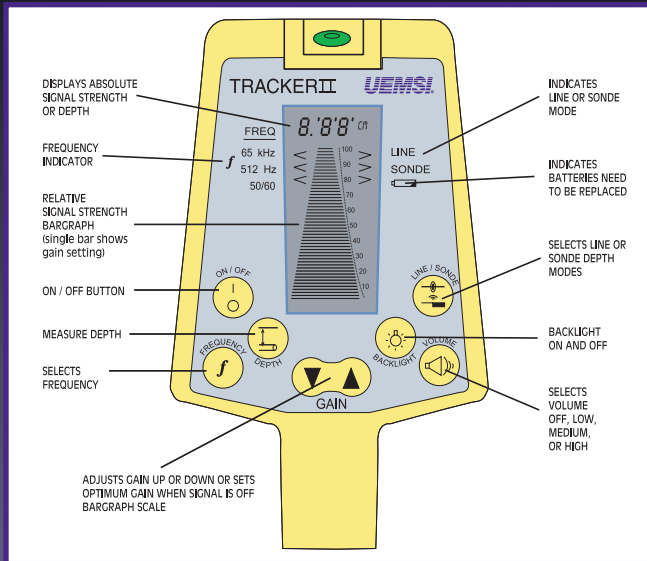


Illustration of the Tracker II's easy-to-use controls and indicators.

TRACKER II® RECEIVER

- Improved sensor technology
- Improved accuracy and productivity
- Push button depth
- Operating modes / frequency: 512 Hz, 50-60 Hz and 65 KHz
- Depth range: up to 15'
- Antenna mode: peak (horizontal coil)
- Indicators: LCD digital signal readout, graphic display, variable audible tone, depth indicator, battery status
- Receiver size: 30.3" L x 3.75" W x 9.4" H
- Receiver weight: 3 lbs.
- Receiver power: 6 C batteries
- Battery life: 40 hours continuous use
- Includes soft carrying case

TRACKER® IN-LINE TRANSMITTER

The Tracker® in-line transmitter is installed directly between the spring termination and the UEMSI camera head. This transmitter is powered directly from the power control unit.

- Operating frequency: 512 Hz
- Transmitting range: up to 24'
- Flexibility: spring termination
- Transmitter dimensions: 1-1/2" OD x 5-3/4" L
- Transmitter power: UEMSI PCU powered*
* No batteries required *



INVESTIGATOR® TRANSMITTER

Designed to work with any 512 Hz locator system, this battery operated transmitter can easily be added to push cable, pull cable, drain cleaning machines or jeters.

- Operating frequency: 512 Hz
- Transmitting range: up to 24'
- Flexibility: stainless steel braided hose
- Transmitter dimensions: 7/8" OD x 13-1/2" L
- Transmitter power: one (1) three volt "N" size battery



THE EDGE® LOCATOR NOZZLE (1" NPT)

When cleaning, this revolutionary jetter nozzle transmitter pin-points the exact location of a broken pipe.

- Constructed from stainless steel, this UEMSI exclusive is excellent for industrial applications where blueprints are not available. Use with the UEMSI Tracker II, or any other receiver with a 512 Hz frequency. May be pushed to 3/4". Eight rear jets, 35-80 GPM and 2000 PSI.



★ Specifications are subject to change. ★

Distributed by: